


PRODUCT FEATURES



Bali® aluminum horizontal blinds are manufactured using the most flexible, corrosion-resistant slat material available. All Bali® horizontal blinds are finished with our Advanced Finishing Technology (AFT), providing an anti-static paint finish. This classic window treatment features privacy, light control, durability and a wide array of colors and options.

- 1 x 1-1/2" integrated headrail with light-blocking lip
- AFT anti-static paint finish
- Snap-in hidden brackets
- .006" thick 1/2" wide slats
- 12.5 mm ladder spacing
- Disengaging clutch
- Crash-proof cord lock
- Box bracket option
- Limited-lifetime warranty

PRODUCT DRAWING

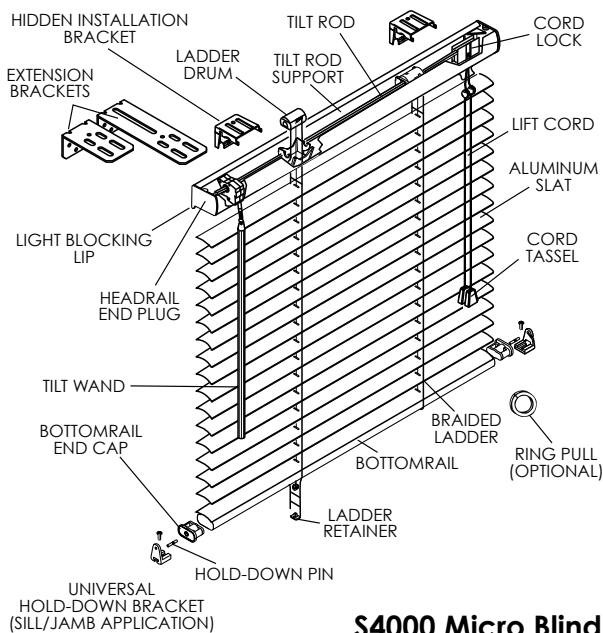

S4000 Micro Blind

1. Extension brackets
2. Installation bracket
3. Ladder drum
4. Tilt rod support
5. Tilt rod
6. Cordlock
7. Lift cord
8. Slats
9. Tassel
10. Ring pull
11. Braided ladder
12. Bottomrail
13. Bottom plug
14. Hold down pin
15. Hold down bracket
16. Bottomrail end cap
17. Tilt wand
18. Head rail end plug
19. Light blocking lip



MAG Resources, LLC

SPECIFICATIONS

HEADRAIL

shall be 1" high x 1-1/2" wide x .025" thick steel valance-free design with a curved front profile, rolled edges at the top and a light blocking lip at the lower back side. The steel finishing process includes phosphate treatment for corrosion resistance, a chrome-free sealer, a low HAP urethane primer and a topcoat with low HAP polyester baked enamel.

TILTER

Tilter shall be made of injection-molded thermoplastics for smooth low-friction operation and will incorporate a clutch mechanism to prevent damage due to over tilting.

TILT ROD

Tilt rod shall be electro-zinc coated solid steel measuring 1/4" square.

LADDER DRUM

Drum and cradles shall be low-friction thermoplastic and provided for each ladder.

TILT WAND

Tilt wand shall be clear polycarbonate with a hexagonal cross section measuring approximately 1/4" diameter and attached to the tilter shaft by means of a spring clip for easy removal.

CORD LOCK

Cord lock shall be metal of a snap-in design incorporating a floating, shaft-type locking pin and shall incorporate a crash proof safety feature that will lock blind automatically upon release of cord.

INSTALLATION BRACKETS

Installation brackets shall be top loading, zinc plated steel with a snap-in design for easy installation.

BRAIDED LADDER

Braided ladder shall be made of 100% polyester yarn incorporating two extra strength rungs per ladder for slat support. Standard ladder spacing shall be 12.5mm.

SLATS

Slats shall be 5000 series cold-rolled aluminum containing the maximum allowable recycled content to produce a high strength and corrosion resistant flexible product. Slats shall be nominally 1/2" wide x .006" thick and processed with Advanced Finishing Technology (AFT), providing a smooth, hard, less porous surface. AFT delivers anti-static performance to repel dust. Slats shall be treated with a topcoat of polyester baked enamel.

BOTTOMRAIL

Bottomrail shall be completely enclosed tubular shape made of phosphate-treated steel for corrosion resistance and finished with a chrome-free sealer, low HAP urethane primer and a topcoat of low HAP polyester baked enamel and shall measure .025" thick.



MAG Resources, LLC



MAG Resources, LLC